


**COLONNA DI GUIDA LISCIA PER GABBIE A SFERA**  
*GUIDE PILLAR WITHOUT OIL GROOVES FOR BALL CAGES*  
 FLACHE FÜHRUNGSBOLZEN FÜR KUGELFÜHRUNGSEINHEITEN

**ECO-2SG**

**Acciaio:** *Da tempra superficiale*  
**Steel:** *For surface temper*  
**Stahl:** *Für oberflächliche Härtung*

**Durezza:** Superficie HRC 60-63 / resistenza al cuore 900 N/mm<sup>2</sup>  
**Hardness:** Surface HRC 60-63 / core strenght 900 N/mm<sup>2</sup>  
**Härte:** Oberfläche HRC 60-63 / Kernwiderstand 900 N/mm<sup>2</sup>

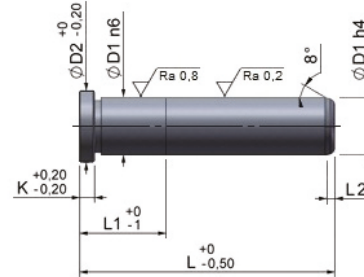

D1	D2	K	L1	L2	L							
					80	100	120	140	160	200	240	
12	16	4	20	4	-	-	-	-	-	-	-	-
18	22	6	24	7	-	-	-	-	-	-	-	-
30	36	6	24	7	-	-	-	-	-	-	-	-

**Esempio di ordinativo:** D1xL    **Order example:** D1xL    **Bestellbeispiel:** D1xL