

## Elastomer-Druckfedern


70 ± 3 Shore A

## Elastomer coil springs

70 ± 3 Shore A

## Ressorts élastomère

70 ± 3 Shore A

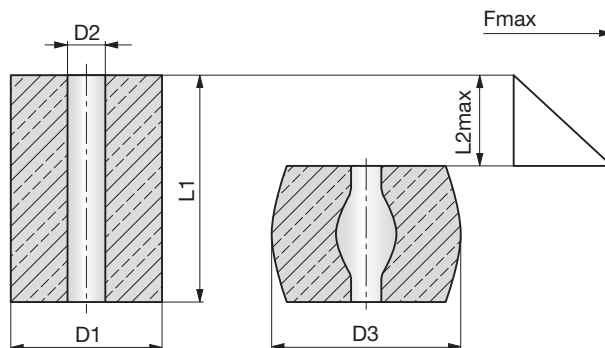

1 daN = 10N  
Fmax (Fn) = daN


3

SN2625-

Mat.: CR  
DIN 9835



SN2625-D1-L1



| D1 | L1  | D2   | L2max = L1 x 40% |      |    | D1  | L1  | D2   | L2max = L1 x 40% |      |      |     |
|----|-----|------|------------------|------|----|-----|-----|------|------------------|------|------|-----|
|    |     |      | L2max            | Fmax | D3 |     |     |      | L2max            | Fmax | D3   |     |
| 16 | 12  | 6,5  | 5,0              | 46   | 22 | 63  | 40  | 17,0 | 16,0             | 1380 | 85   |     |
|    | 16  | 6,5  | 6,5              | 45   | 22 |     | 50  | 17,0 | 20,0             | 1360 | 85   |     |
|    | 20  | 6,5  | 8,0              | 44   | 22 |     | 63  | 17,0 | 25,2             | 1300 | 85   |     |
|    | 25  | 6,5  | 10,0             | 43   | 22 |     | 80  | 17,0 | 32,0             | 1300 | 85   |     |
| 20 | 16  | 8,5  | 6,5              | 67   | 27 | 100 | 100 | 17,0 | 17,0             | 1280 | 85   |     |
|    | 20  | 8,5  | 8,0              | 65   | 27 |     | 125 | 17,0 | 50,0             | 1280 | 85   |     |
|    | 25  | 8,5  | 10,0             | 62   | 27 |     | 80  | 32   | 21,0             | 12,8 | 2100 | 108 |
|    | 32  | 8,5  | 12,8             | 60   | 27 |     |     | 40   | 21,0             | 16,0 | 2080 | 108 |
| 25 | 20  | 10,5 | 8,0              | 100  | 34 | 100 | 50  | 21,0 | 20,0             | 2000 | 108  |     |
|    | 25  | 10,5 | 10,0             | 95   | 34 |     | 63  | 21,0 | 25,2             | 1980 | 108  |     |
|    | 32  | 10,5 | 12,8             | 92   | 34 |     | 80  | 21,0 | 32,0             | 1960 | 108  |     |
|    | 40  | 10,5 | 16,0             | 95   | 34 |     | 100 | 21,0 | 40,0             | 1960 | 108  |     |
| 32 | 32  | 13,5 | 12,8             | 250  | 44 | 100 | 125 | 21,0 | 50,0             | 2000 | 108  |     |
|    | 40  | 13,5 | 16,0             | 260  | 44 |     | 32  | 21,0 | 12,8             | 3900 | 135  |     |
|    | 50  | 13,5 | 20,0             | 260  | 44 |     | 40  | 21,0 | 16,0             | 3750 | 135  |     |
|    | 63  | 13,5 | 25,2             | 250  | 44 |     | 50  | 21,0 | 20,0             | 3600 | 135  |     |
| 40 | 32  | 13,5 | 12,8             | 470  | 54 | 100 | 63  | 21,0 | 25,2             | 3400 | 135  |     |
|    | 40  | 13,5 | 16,0             | 440  | 54 |     | 80  | 21,0 | 32,0             | 3300 | 135  |     |
|    | 50  | 13,5 | 20,0             | 430  | 54 |     | 100 | 21,0 | 40,0             | 3250 | 135  |     |
|    | 63  | 13,5 | 25,2             | 430  | 54 |     | 125 | 21,0 | 50,0             | 3250 | 135  |     |
| 50 | 80  | 13,5 | 32,0             | 420  | 54 | 125 | 32  | 27,0 | 12,8             | 6600 | 170  |     |
|    | 32  | 17,0 | 12,8             | 810  | 68 |     | 40  | 27,0 | 16,0             | 6300 | 170  |     |
|    | 40  | 17,0 | 16,0             | 780  | 68 |     | 50  | 27,0 | 20,0             | 6200 | 170  |     |
|    | 50  | 17,0 | 20,0             | 750  | 68 |     | 63  | 27,0 | 25,2             | 6000 | 170  |     |
| 63 | 63  | 17,0 | 25,2             | 720  | 68 | 125 | 80  | 27,0 | 32,0             | 5900 | 170  |     |
|    | 80  | 17,0 | 32,0             | 700  | 68 |     | 100 | 27,0 | 40,0             | 5750 | 170  |     |
|    | 100 | 17,0 | 40,0             | 720  | 68 |     | 125 | 27,0 | 50,0             | 5600 | 170  |     |
|    | 32  | 17,0 | 12,8             | 1400 | 85 |     | 160 | 27,0 | 64,0             | 5500 | 170  |     |

### Federkennlinien

Elastomer-Druckfedern - 70 ± 3 Shore A

### Spring characteristics

Elastomer coil springs - 70 ± 3 Shore A

### Caractéristiques des ressorts

Ressorts élastomère - 70 ± 3 Shore A

